



1. Fix the lamp (without metal cover) with screws or double adhesive tape

(-) Installation

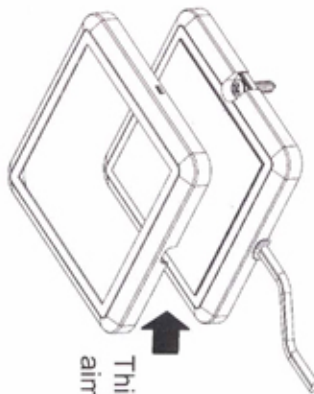

2. Put on the metal cover

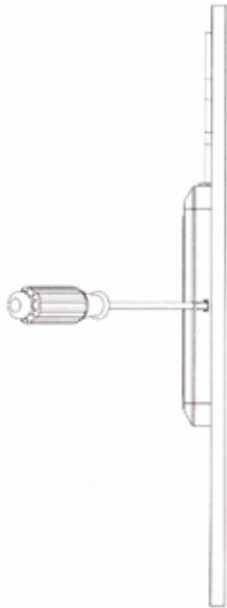

(=) Metal cover removal: put the tip of screw driver into the indent of the metal cover, then pull down smoothly

